

BUILDING GUIDE

COLORADO CHAPTER OF THE INTERNATIONAL CODE COUNCIL

SINGLE FAMILY RESIDENTIAL PATIO COVERS AND CARPORTS

How to use this guide


Check with your jurisdiction regarding type of submittal (paper or electronic) and additional requirements. Draw to scale and complete the following (hint: use graph paper with $\frac{1}{2}$ " squares. Example: $\frac{1}{2}$ " = 1').

- 1. **Complete this building guide** by filling in the blanks on page three through five and indicate which construction details will be used.
- 2. **Provide 2 plot plans** (site plans) showing the dimensions of your project and its relationship to existing buildings and/or structures on the property. The distances to the existing property lines shall be drawn to scale. See page 2.
- 3. Fill out building permit application.

 The majority of permit applications are


The majority of permit applications are process with little delay. The submitted documents will help determine if the project is in compliance with building safety codes, zoning ordinances and other applicable laws.

The Colorado Chapter of The International Code council is a professional organization seeking to promote the public health, safety, and welfare to building construction. We appreciate your feedback and suggestions. Please write to Colorado Chapter of the International Code Council, at P.O. Box 961, Arvada, CO 80001. This Building guide can be found on the Colorado Chapter of the International Code Council website at http://www.coloradochaptericc.org

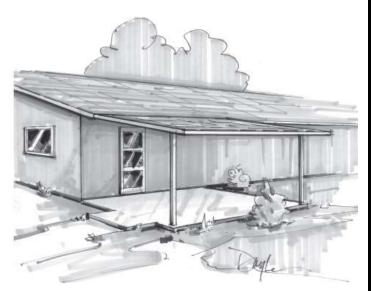



SITE PLAN

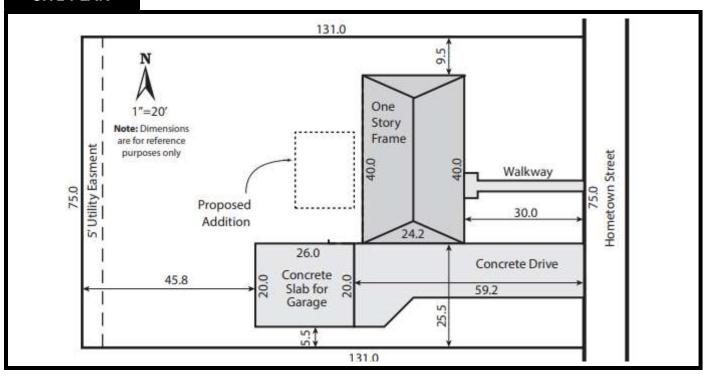




FOR ALL DETAILS ON PAGE 4 – NOTCHES ON CANTILEVERED PORTIONS OF RAFTERS ARE PERMITTED PROVIDED THE DIMENSIONS OF THE REMAINING PORTION OF THE RAFTER IS NOT LESS THAN 3 1/2 INCHES (89 MM) AND THE LENGTH OF THE CANTILEVER DOES NOT EXCEED 24 INCHES (610 MM).





- ADDRESS:
- 1. Fill in the blanks with dimensions and materials which will be used to build the structure. Please print legibly.
- 2. Indicate in the check boxes which details from page 4 and 5 will be used. Please note your project may be subject to fire restrictive construction requirements. Please refer to page 6 for further information on fire constructive requirements. Zoning approval is required for all projects.
- 3. Roofing to be installed per manufacture instructions, including low slope application, and required inspections made.

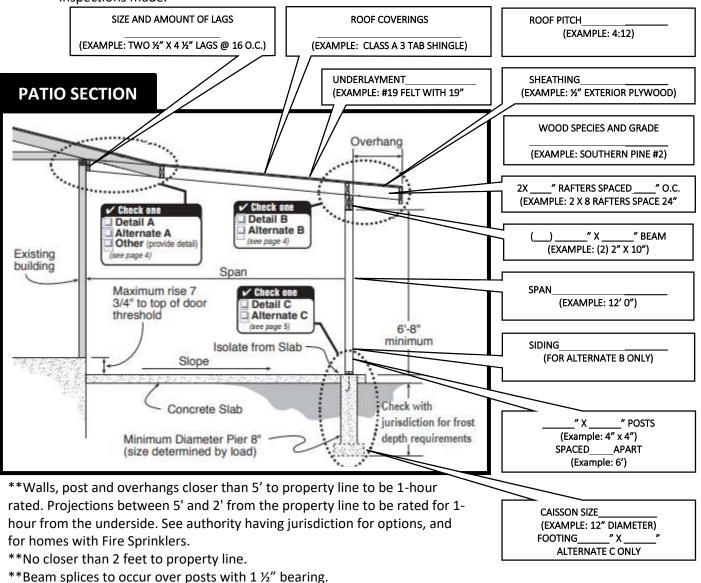




Existing roof rafters or trusses Galvanized metal joist or rafter hangers Extend underlayment from new roof a minimum of 18" onto existing roof Cont. 2x ledger Secure ledger to wall with lag screws @ 16" O.C. Locate lag screws to penetrate top plate or studs Note: Remove brick veneer at top of wall before installing continuous 2x ledger

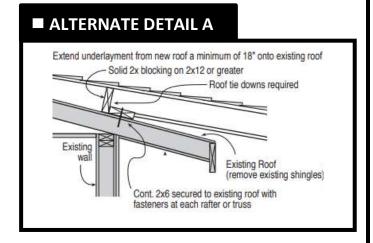


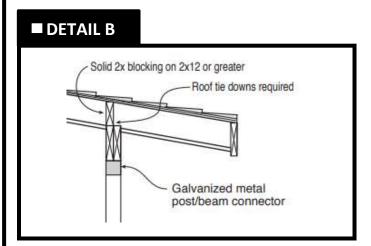

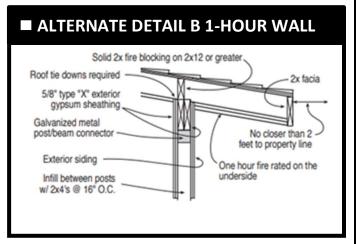





post must be centered on foundation element Minimum 3 1/2" Galvanized column base with spacer to concrete slab in the space

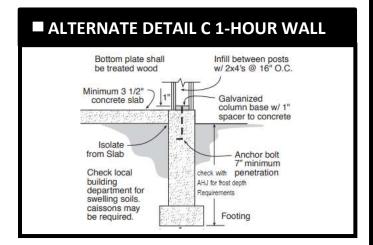

■ DETAIL D

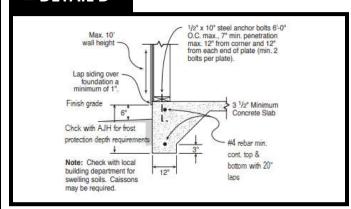

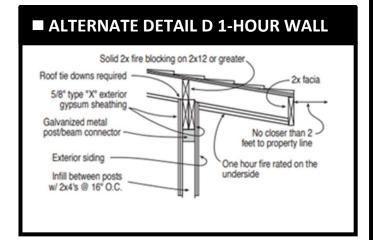



- 1. Projections cannot be closer than 2 feet to the lot line. Projections that have a fire separation distance of less than 5 feet from the lot line in unsprinklered buildings, or less than 3 feet in sprinklered buildings, are required to be protected on the underside with 1-hour fire-resistant construction. The underside protection may be omitted where fireblocking is provided or gable vents openings are not present.
- 2. Total area of the openings in a wall with a fire separation distance that is equal to or greater than 3 feet, but less than 5 feet from the lot line, be less than 25 percent of the maximum wall area

